

Speed rpm	Type of Operation	Engine Output		Typical Generator Output* (Net)		
		Gross kWm	Net kWm	kVA	kWe	alter.
1500 (50hz)	ESP	225	219	255	204	93.5%
	PRP	205	199	232	186	93.5%
	COP	144	138	161	129	93.5%
1800 (60hz)	ESP	260	249	291	233	93.5%
	PRP	236	225	263	210	93.5%
	COP	165	154	180	144	93.5%



* Ratings Definitions

The power ratings of Emergency Standby and Prime are in accordance with ISO 8528.

Fuel Stop power in accordance with ISO 3046. The typical generator output shown is an estimation. Consult your local application engineer for engine selection support and actual OEM genset power output calculation. Also, it must be considered alternator efficiency, altitude derating and ambient temperature.

ESP(STANDBY POWER) is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. A standby rated engine should be sized for a maximum of an 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating.

PRP(PRIME POWER) is available for an unlimited number of hours per year in variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 24 hours. The Total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12 hours period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

COP(CONTINUOUS POWER) is defined as being the maximum power which the generating set is capable of delivering continuously whilst supplying a constant electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer.

DCP(DATA CENTRE POWER) is available for variable or continuous electrical loads in a data centre application. Up to 100 percent load factor is permitted for unlimited time. DCP power definition relies on ISO 8528-1 2018 standard to be followed by generator set manufacturer, and will support Tier I to Tier IV classifications of data centres as per UPTIME institute guidelines.

This definition is only back up a reliable utility.

Continuous operation at load is available as after approval of Engine manufacturer (HDI).

General Engine Data

• Engine Suffix	DX08-MFG03
• Emission Compliance	EU Stage V
• Engine Type	4-cycle, In-line, Diesel engine
• Number of Cylinders	6-cylinder
• Bore x Stroke	110 x 132 mm
• Displacement	7.527
• Compression Ratio	16.6 : 1
• Compression Pressure	25bar (@200rpm)
• Rotation	Counter clockwise viewed from Flywheel
• Firing Order	1-5-3-6-2-4
• Aspiration	Turbo charged & Intercooled (air to air)
• Injection Timing	Controlled by ECU
• Dry Weight	818.5 kg(With Fan)
• Dimension (LxWxH)	1,319 x 967 x 1,187 mm (Without Radiator)
• Flywheel Housing	SAE NO.1M
• Flywheel Size	Clutch NO.14"
- Number of Teeth	112

Engineering Data

• Maximum Bending Moment at Rear Face to Block	-
• Maximum Intake Air Restriction	6.3kPa
• Maximum Exhaust Back Pressure	45kPa
• Maximum Static Pressure After Radiator	0.125kPa
• Maximum CAC Pressure Drop	10kPa
• Maximum Turbine Inlet Gas Temperature	760°C at ESP 730°C at PRP&COP
• ATB	62°C (Cooling fan inlet air temp.)
• Valve System Type	Over head valve
• Number of Valves	Intake 2, exhaust 2 per cylinder
• Valve lashes at cold	N/A (Hydraulic Lash Adjustment)
• Valve timing	Opening Close
- Intake valve	32° BTDC 60° ABDC
- Exhaust valve	61° BBDC 45.1° ATDC

Electrical System

• Alternator	27.5V x 45A
• Voltage Regulator	Built-in type IC regulator
• Starting Motor	24V x 6.0kW
• Battery Voltage	24V
• Battery Capacity	200Ah x 2ea (recommended)
• Starting Aid (Option)	N/A
• Cold start	-20°C Without heater: In 20sec 25°C Without heater: In 3sec

Cooling System

• Cooling Method	Fresh water forced circulation
• Water Capacity	18 liter (engine only) 42 liter (with radiator)
• Water flow rate	338liter/min@1500rpm 405liter/min@1800rpm
• Pressure CAP	90kPa
• Water Temperature	Maximum : 110°C Before start of full load : 40.0°C
• Water Pump	Centrifugal type driven by belt
• Thermostat type and range	Wax-pellet type, Opening temp 71°C, Full open temp 85°C
• Cooling Fan	Blower type, Ø810mm, 7 blades
• Water Pump Path	1Path, 1Line

Fuel System

• Injection Pump	Bosch CP4
• Governor	Controlled by ECU
• Speed Drop	G3 Class (ISO 8528)
• Feed Pump	Gear type
• Injection Nozzle	Multi hole type
• Max. Injection Pressure	1800bar
• Opening Pressure	Controlled by ECU
• Fuel Filter	Full flow, Cartridge type
• Maximum Fuel Inlet Restriction	N/A
• Maximum Fuel Return Restriction	N/A
• Fuel Inlet Pressure Requirement	0.5~1bar(abs)
• Fuel Outlet Pressure Requirement	0.6~1.2bar(abs)
• Fuel Feed Pump Capacity	120liter/hr@1500rpm, 144liter/hr@1800rpm
• Used fuel	Korea : ENFORCEMENT RULE OF CLEAN AIR CONSERVATION ACT ATTACHED TABLE 33 DIESEL North America : ASTM D975C-15 Grades 1D or 2D Europe : EN 590: 2013+A1:2017 Japan : JIS K2204:2007



Lubrication System

• Lubrication Oil	SAE 10W40 (API CK-4 grade)
• Lub. Method	Fully forced pressure feed type
• Oil Pump	Gerotor type driven by crankshaft gear
• Oil Filter	Full flow, cartridge type
• Oil Pan Capacity	High level 35 liter (max) Low level 18 liter (min)
• Maximum Oil Temp.	130°C
• Lub Oil Pressure	Idle speed : Min 100 kPa Rated speed @ 1500RPM : Min 250 kPa Rated speed @ 1800RPM : Min 300 kPa

Performance data





		ESP		PRP		COP	
• Governed Engine Speed	rpm	1500	1800	1500	1800	1500	1800
• Engine Idle Speed	rpm	800	800	800	800	800	800
• Over Speed Limit	rpm	2160	2160	2160	2160	2160	2160
• Gross Engine Power Output	kW	225	260	205	236	144	165
• Break Mean Effective Pressure	Mpa	2.39	2.30	2.18	2.09	1.53	1.46
• Mean Piston Speed.	m/s	6.6	7.9	6.6	7.9	6.6	7.9
• Specific Fuel Consumption							
25% load	liters/hr	14.7	17.7	13.6	16.4	10.4	12.6
50% load	liters/hr	26.9	31.9	24.7	29.3	18.1	21.5
75% load	liters/hr	39.4	46.2	36.0	42.2	25.9	30.5
100% load	liters/hr	52.9	62.7	47.8	56.1	33.9	39.5
25% load	g/kWh	217.9	227.7	221.4	231.7	241.4	255.6
50% load	g/kWh	199.8	205.2	201.4	207.1	209.5	218
75% load	g/kWh	195.1	198	195.7	199	200.4	206.2
100% load	g/kWh	196.2	201.3	194.6	198.4	196.4	200.1
• Fan Power	kW	6.5	11	6.5	11	6.5	11
• Sound Pressure at 1m (Without Fan)		94.7	95.8	94.7	95.8	92.4	94.1
• Intake Air Flow	m ³ /min	13.7	16.5	13.1	15.7	10.9	13.0
• Exhaust gas temp. after turbo	°C	649	661	627	637	523	545
• Exhaust gas flow	m ³ /min	35	39.6	33.5	37.9	27.5	31.4
• Heat rejection to coolant	kW	103	103	103	103	103	103
• Heat rejection to intercooler	kW	62	62	62	62	62	62
• Cooling water circulation	liters/min						
1800 rpm		405	405	405	405	405	405
1500 rpm		338	338	338	338	338	338
• Cooling fan air flow	m ³ /min	270	330	270	330	270	330

Derating from ISO 3046 Standard Conditions

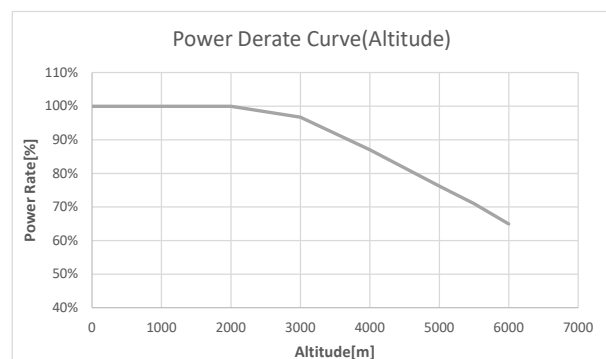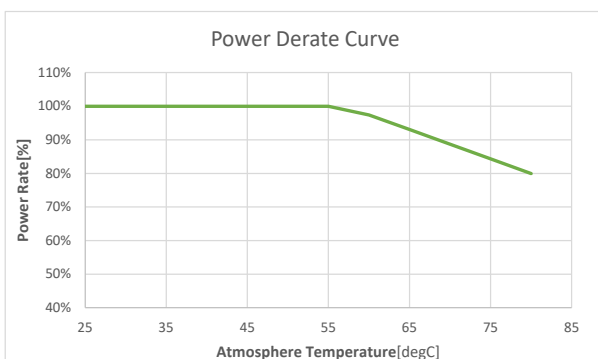

Engine Dimension

- Dimension and Weight Without Rad (LxWxH) : 1,319 x 967 x 1,187 mm / 818.5 kg
- Dimension and Weight With Rad (LxWxH) : 2,019 x 1,084 x 1,322 mm / 938.5 kg
- Dimension and Weight of ATS (LxWxH) : 790 x 831 x 513 mm / 119 kg
- Dimension and Weight of DEF Tank (LxWxH, 72L) : 682 x 375 x 688 mm / 34 kg(empty)

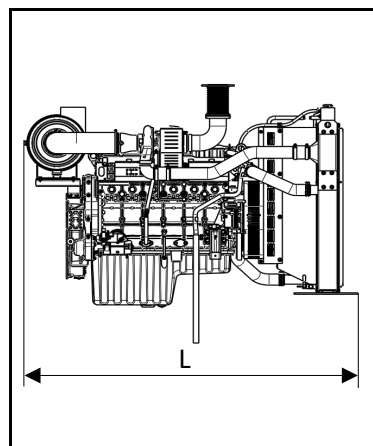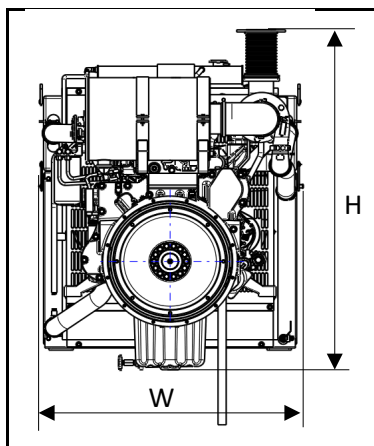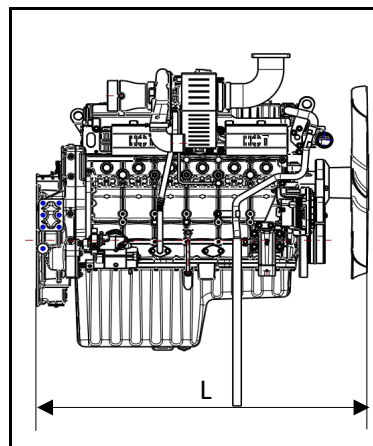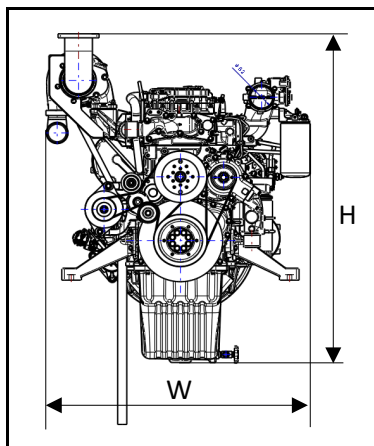

Conversion Table

in = mm x 0.0394

ps = kW x 1.3596

psi = kg/cm² x 14.2233

in³ = lit. x 61.02

hp = PS x 0.98635

lb = kg x 2.20462

lb/ft = N.m x 0.737

U.S. gal = lit. x 0.264

kW = 0.2388 kcal/s

lb/PS.h = g/kW.h x 0.00162

cfm = m³/min x 35.336

HD Hyundai Infracore Co., Ltd.

13F, HD Hyundai Group's Global R&D Center, 477, Bundangsuseo-ro
Bundang-gu, Seongnam-si, Gyeonggi-do, Korea(13553)

Tel : +82 32 211 1114

E-mail : enginesales@hd.com

Website : www.hd-hyundaiengine.com



**HD HYUNDAI
INFRACORE**

※ Specifications are subject to change without prior notice.